



# Chalkboard



## FABRICS

Cotton, Uncoated Polyester, Fabric Blends, Spandex, Wool, Linen and \*Nylon.

## SIZING

Available Widths (in.): \*12", 15" and 20"  
Available Lengths (ft.): 15', 30', 45', 60', 90', and 150' rolls  
\*12" x 150' only

## THICKNESS


3.7 mils/95 microns

Turbo adhesive allows a low temperature and quick press time, eliminating press marks. Durable, weeds easily and has a soft hand and strong grip. Chalk can be wiped away easily with a wet cloth. Pressure-sensitive carrier enables easy weeding and repositioning.



### SPECIAL PRECAUTIONS

\*Please reference starred instructions for Nylon application.

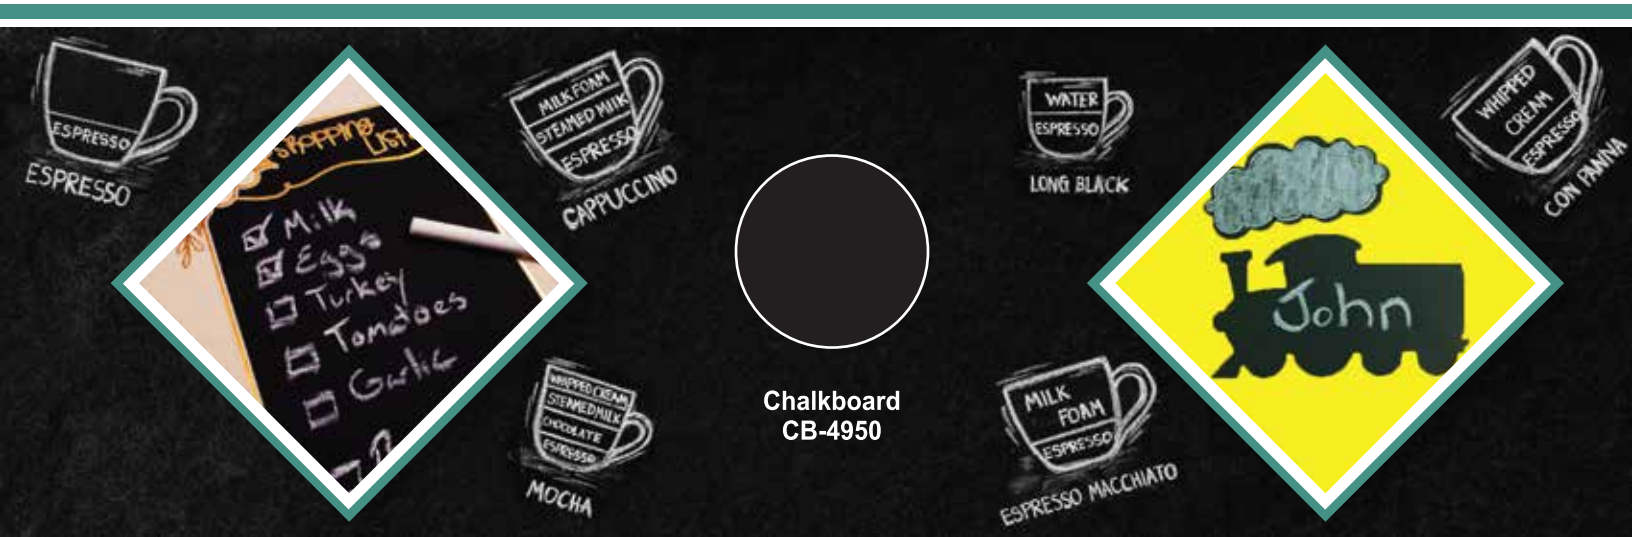

Chalkboard  
CB-4950

### MIRRORING

Cut this material into a mirror image.



### CUTTING

45° Blade Recommended



### TEMPERATURE

270°F | \*Nylon: 300°F



### PRESSING | TIMING

Medium pressure | 5 seconds  
\*Nylon: Low pressure | Pre-press garment for 5 seconds, press material for 5 seconds.



### PEELING

Peel warm | \*Nylon: Peel warm, cover with a silicone sheet, and re-press for 10 seconds.



### WASHING

Turn inside-out, wash warm, regular cycle, mild detergent. No bleach. Tumble dry normal. Do not iron material. Suitable for dry-cleaning.



### LASER COMPATIBLE

This product contains no PVC and will not emit hazardous fumes.



"It's best to test!" Pre-test on an inconspicuous area before applying final production. Some garments require pre-heating and treatment, such as blotting moisture-wicking material with rubbing alcohol, before pressing the material. Dye migration may occur with low-energy dyes in polyester and blend fabrics. Check for compatibility and pre-treatment suggestions with each product's instructions. The user assumes all risk and liability whatsoever in connection with the use of this product. Specialty Materials cannot guarantee performance for conditions not under the manufacturer's control and is not responsible for issues due to third-party material qualities. The Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by the manufacturer.

©2023 Specialty Materials & Digital Decoration, LLC. | A POLI-TAPE Company | All rights reserved | Tulsa, OK 74146 | 877-437-8556

Tech Help: [tech@specialtymaterials.com](mailto:tech@specialtymaterials.com) | Sample Request: [samples@specialtymaterials.com](mailto:samples@specialtymaterials.com)