

# Economy Flex™

- You can achieve various finishes by using different repressing techniques
- Thicker film for polyester mesh & polyester athletic uniforms
- Great for names and numbers for sport applications
- Manufactured without the pressure-sensitive carrier for easy stacking

## Acceptable Fabrics

Cotton, Uncoated Polyester, Mesh, & Poly-Blend Fabrics  
 Excluding Nylon

## Sizing Available

Available Widths (in.): 20" only  
 Available Lengths (ft.): 15', 30', 45', 60', 75', and 162'

## Thickness


6.8 mils/170 microns

## Special Precautions





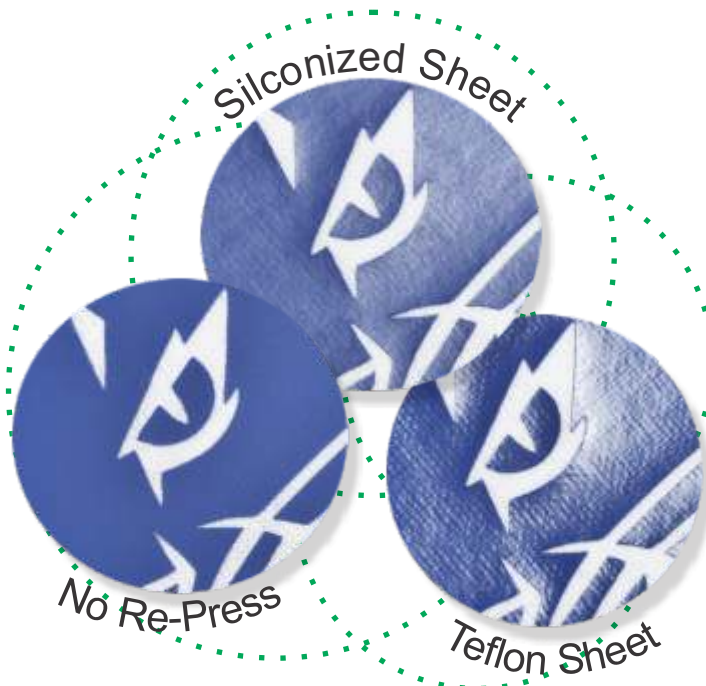


This is a PVC product, which emits hazardous fumes when cut with a laser machine!

\*This product cannot be layered.

- Black - EF-01
- White - EF-02
- Red - EF-03
- Ath. Gold - EF-04
- Navy - EF-05
- Grey - EF-06
- Sky Blue - EF-07
- Kelly Green - EF-08
- Royal Blue - EF-09
- Ath. Dark Gold - EF-10
- Orange - EF-11
- Purple - EF-12
- Brown - EF-13
- Pink - EF-14
- Crimson - EF-15
- Silver (Metallic) EF-17
- Neon Yellow - EF-18
- Neon Orange - EF-19
- Neon Pink - EF-20
- Neon Green - EF-21
- Neon Blue - EF-22
- Lemon Yellow - EF-23
- Dark Green - EF-24
- Light Green - EF-25
- Aqua - EF-26
- Hot Red - EF-27
- Hot Pink - EF-28
- Deep Blue - EF-29
- Light Blue - EF-30
- Khaki - EF-31
- Camel - EF-32
- Light Gold - EF-40



Re-press with sheet for 5 seconds

-  45° Blade Recommended
-  Cut this material in mirror image
-  330°F
-  Medium, even pressure
-  10-15 Seconds
-  PEEL Peel warm or cold
-  Machine wash cold & line dry.

SpecialtyMaterials.com | 877.437.8556

Specialty  
Materials™

Test on dazzle cloth and other moisture-wicking polyesters. Moisture-wicking materials have better adhesion when washed and dried using no fabric softener or blotted with rubbing alcohol before pressing. Be advised that dye migration has occurred with low energy dyes in polyester and poly-blend fabrics. All technical information and recommendations are based on tests we believe to be reliable. However, we cannot guarantee performance for conditions not under manufacturer's control. Before using, please determine the suitability of product for its intended use. The user assumes all risk and liability, whatsoever, in connection with the use of this product. Seller's and manufacturer's only obligation shall be to replace such quantity of the product proved to be defective by manufacturer.

Copyright © 2022, Specialty Materials & Digital Decoration, LLC. All rights reserved. Tulsa, OK 74107 | 866-437-8599